

# **SPECIFICATION FOR APPROVAL**

Customer:		
Description	AC FAN	
Customer Part No:		REV:
Fulltech Model No:	UF-20TC23BWH-026370	REV: <b>00</b>
Issue Date:	MAY.28.21	
PLEASE SEND ONE (	COPY OF THIS SPECIFIC	CAITON BACK AFTER YOU
SIGNED APPROVAL F	OR PRODUCTION PRE-	ARRANGMENT.
APPROVED BY:		
DATE:		

FULLTECH ELECTRIC CO., LTD NO.31, NEI-SHI ROAD, LU-CHU DISTRICT 33852, TAOYUAN CITY, TAIWAN, R.O.C.

TEL: 886-3-3246161 FAX: 886-3-3245596



# FULLTECH® FULLTECH ELECTRIC CO., LTD.

## \*\*\*HISTORY\*\*\*

CL	JSTOME	ER:						
CL	CUSTOMER P/N:							
Fι	FULLTECH MODEL: <u>UF-20TC23BWH-026370</u>							
						ISSUE		
	REV	DESCRIPTION	DRAWN	CHECKED	APPROVED	DATE		



# **SPECIFICATIONS**


MODEL			
ITEM	UF-20TC23BWH-026370		
RATED VOLTAGE	AC230V		
VOLTAGE RANGE	AC207-253V		
SPEED(RPM)	50Hz 2850 RPM±10% 60Hz 3350 RPM±10% 50Hz 0.42 A±10% 60Hz 0.52 A±10% 50Hz 88 W±10% 60Hz 121 W±10% 50Hz 1.4 A±10% 60Hz 1.3 A±10%		
RATED CURRENT			
RATED INPUT			
LOCKED CURRENT			
MAX. AIR VOLUME	50Hz 610±10% CFM 60Hz 710±10% CFM		
MAX. STATIC PRESSURE	50Hz 1.15±10% inH2O 60Hz 1.45±10% inH2O		
OPERATING TEMP.	-40°C∼+70°C		
MAX. OPERATING HUMIDITY	85%		
STORAGE TEMP.	-40℃~+80℃		
ROTATING DIRECTION	ANTI-CLOCKWISE DIRECTION		
BLOWING DIRECTION	EXHAUST OVER STRUTS		
INSULATION RESISTANCE	DC 500 V 100M Ω		
DIELECTRIC STRENGTH	AC 1500V / 1MIN		
NOISE	50Hz 68 (Max.73) dB 60Hz 72 (Max.77) dB		
SAFETY PROTECTION	THERMAL PROTECTION		
INSULATION GRADE	CLASS A		
BEARING	HYBRID BEARING		
LIFE EXPECTANCY	OVER 80000 HOURS (40°C)		
FRAME MATERIAL	ALUMINUM (ADC-12)		
IMPELLER	PLASTIC 94V-0 PC. COVERING GLASS FIBER		
	205*205*72mm		
DIMENSION	205*205*72mm		



## FULLTECH ELECTRIC CO., LTD.

#### NOTES:


- 1.ALL READINGS ARE MEASURED AFTER STABLY WARMING UP THROUGH 30 MINUTES.
- 2. STANDARD AIR PROPERTY IS AIR AT (Td) 25°C TEMPER ATURE, (RH) 65% RELATIVE HUMIDITY, AND (Pb) 760 mmHg BAROMETRIC PRESSURE.
- 3. ACOUSTICAL NOISE MEASURING CONDITION:

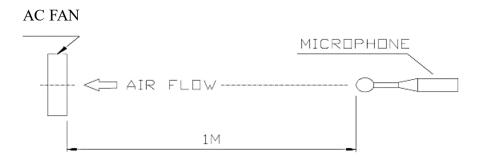

4. NOISE IS MEASURED AT RATED VOLTAGE IN FREE AIR IN A SEMI-ANECHOIC CHAMBER WITH A & D SOUND LEVEL METER WITH MICROPHONE AT A DISTANCE OF ONE METER FROM THE FAN INTAKE.



# **PRODUCT DRAWING**

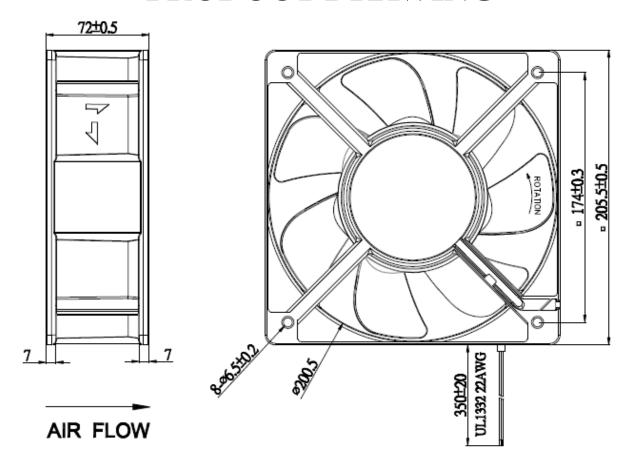


Lead Wire Type



# AIR FLOW-STATIC PRESSURE CURVE

品名: 軸流扇 測試日期: 2019/11/21

規格: UF - 20TC23B-H

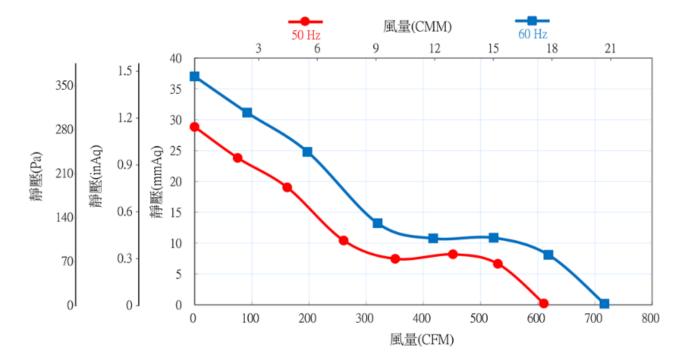



# **Operating Manual**

#### 1. SAFETY REGULATIONS AND INFOMRATION

- Read following operating instructions carefully before starting work on the device.

  Observe the following warnings to prevent machine malfunctions or danger to persons.
- These operating instructions maybe duplicated and distributed to inform about the potential dangers.

### 1.1 Staff Qualifications

- The device may only be transported, unpacked, installed, operated, maintained and otherwise used by qualified, trained and authorized technical staff.
- Authorized specialists are preferred to install the device with the electrical installation and carry out the test run.

#### 1.2 Basic safety rules

- Please make sure the product is being installed and used in compliance with all safety standards.
- The locally applicable industrial safety regulations are always to be observed when working on the device.
- Please handle and install the product with caution. Hit or drop the product may cause possible damage.
- Please do not damage the product, especially the coil or lead wires during the installation, which may cause the possible smoke or fire.
- Fulltech Electric Co., Ltd.'s product warranty will not extend if your application exceeds the limitation of product specification.

# FULLTECH®

### FULLTECH ELECTRIC CO., LTD.

#### 1.3 Mechanical movement

- Risk of injury to body parts if coming into contact with the rotor or the impeller.
- Secure the device against accidental contact
- Before working on the system/machine, wait till all parts come to a standstill.
- Fulltech recommends to protect the fan from exposure to outside elements, such as dust, condensation, humidity or insects. Exposure of this fan to outside elements such as dust, condensation, humidity or insects may effect the fan performance and cause the safety concern.

### 1.4 Transportation

• Transport the fan in its original packaging is preferred.

### 1.5 Storage

- Please follow the requirement on product specification for fan storage. Make sure that fan will dry and clean and free from vibration.
- Please "do not" store the fan in a high humidity environment. If this fan is stored over 6 months, Fulltech suggests functional testing before using.

### 1.6 Warranty

- This fan is warranted against all defects which are proved to be fault in our workmanship and material for one year from the date of our delivery.
- The sole responsibility under the warranty shall be limited to the repair of the fan or the replacement thereof, at Fulltech's sole discretion.
- Fulltech will not be responsible for the failures of it's fan due to improper handling misuse or the failure to follow specification or instruction for use.
- Fulltech will not be responsible for any consequential damage to the customer's equipment as a result of any fans proven to be defective.